



Full Function High Quality Day & Night Color Camera

ITEM NO.: 15-CC35NV

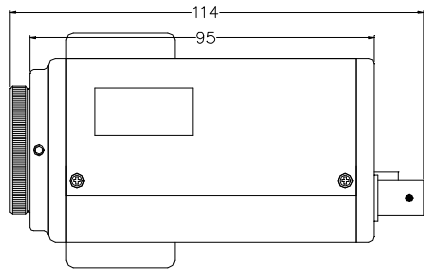


DIP SWITCH		
SW	DOWN	UP
1	AES	AI
2	BLC ON	BLC OFF
3	AGC ON	AGC OFF
4	ATW	AWB
5	NORMAL	MIRROR
6	NORMAL	ZOOM

(REAR)

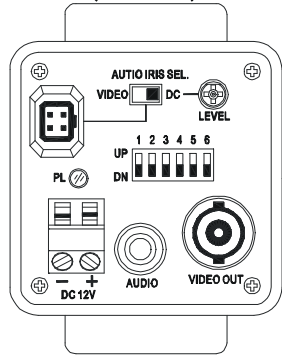

IRIS JACK	Video LENS	DC-LENS
P1	+9V	DUMP-
P2	N.C.	DUMP+
P3	VIDEO	DRIVE
P4	GND	GND



DIMENSION (UNIT:mm)

2. Caution for Installation

- 2.1 Avoid places where there is direct sunlight. When using the camera outside.
- 2.2 Be careful, never let any water in this equipment.
- 2.3 Do not directly touch the CCD element. If necessary, use a soft cloth moistened with alcohol to wipe off the dust.
- 2.4 When the camera installs in dust or wet environment, please puts into the camera housing.
- 2.5 Be extra careful not to shake the camera.
- 2.6 Avoid places where temperatures exceed 50 °C or more.
- 2.7 When any abnormalities occur, make sure to unplug the unit and contact your local dealer.
- 2.8 Please use only **regulated adaptor 12V DC**.
Non-regulated 12V DC adaptor will cause damage to camera.

3. Packing

- | | |
|------------------------|-----|
| 3.1 Camera | ? 1 |
| 3.2 User Manual | ? 1 |
| 3.3 L Shape Wrench | ? 1 |
| 3.4 C to CS Mount Ring | ? 1 |
| 3.5 DC Jack Cable | ? 1 |

4. Specification

ITEMS	15-CC35NV
TYPE	COLOR
PICK UP DEVICE	1/3" SONY CCD IMAGE SENSOR
PICTURE ELEMENTS	EIA / NTSC: 816H x 495V; CCIR/ PAL: 798H x 584V
HORIZONTAL RESOLUTION	Color (Day): 520 Lines B/W (Night): 600 Lines
MINI ILLUMINATION	0.02Lux
VERTICAL FREQUENCY	EIA / NTSC: 60 Hz – CCIR / PAL: 50 Hz
SCANNING SYSTEM	2:1 INTERLACE
S/N RATIO	52dB
ELECTRONIC SHUTTER	1/120,000 sec.
AUTO IRIS LENS	DC DRIVE. / AES / VIDEO DRIVE,
VIDEO OUTPUT	1Vp-p, 75Ohms
AUDIO OUTPUT	MAX 2Vp-p 50 Ohms
GAMMA.	0.45
WHITE BALANCE	AUTO TRACING
BACK LIGHT COMPENSATION	ON/OFF SWITCHABLE
AUTO GAIN CONTROL	ON/OFF SWITCHABLE
MIROR REVERSE PICTURE	ON/OFF SWITCHABLE
DIGITAL ZOOM	2X
DAY & NIGHT	Under 1Lux into monochrome view
DIMENSIONS mm	50.5x50.5x114
WEIGHT g.	265
POWER SUPPLY	DC 12V
POWER CONSUMPTION	150mA
STORAGE TEMPERATURE	-30 to +60?

* The specifications and appearance of the product may changed without notice.